



MHVSR Tub

Medium High Volume Semi Round



Created for low density payloads that require more tub volume ◀ Stockpile or windrow ▶ Watertight; no leaks

800-779-8099 • 712-546-4409 • sidedump.com

Medium High Volume
MHVSR




MHVSR Tub

Medium High Volume Semi Round


	Model S2 MHVSR	Model S3 MHVSR
Frame Length	39'5"	43'4"
Tub Length	34'	36'
Width	102"	
Loading Height	8' 3" @ Tub side, 10' 4" @ Non-Dump side	
Tub Construction	3/16" Thick, AR450 Steel Floor (1/4" available) 3/16" 100 KSI Steel Sides	
Frame Construction	80/100 KSI, Fabricated Steel I-Beam	
Landing Gear	Heavy Duty, Load Bearing Landing Legs are Standard	
Bumper	Push Bar Type, Bolt On	
Cylinders	3500 PSI, 6" Bore	
Suspension	Air Ride Suspension Standard Spring Ride Available	
Axles	25,000# Capacity	
Hubs	10 Hole, Hub Piloted	
ABS	2S1M Anti-Lock Brake System	
Drums	Outboard Mount, Cast Steel	
Wheels	Steel Disc, 8.25 x 22.5	
Tires	11 R 22.5 G Radial Tires	
Brakes	16 1/2" x 7"	
Fenders	Front & Rear, 1/4" Synthetic	
Lights	12 Volt LED ICC w/Sealed Harness	
Mud Flap	(4) Polyline Anti-Spray Splash Guard	
Paint	Polyurethane, any combination of gray, white or black Special colors available upon request	
Min. Tractor Hydraulic Reqs.	25-30 GPM, 2,600-2,800 PSI, 10 Gallon Reservoir	

MHVSR Tub Capacities

	34' Tub	36' Tub
Waterfull	25 cu yd	27 cu yd
Heaped	42 cu yd	45 cu yd



Model S2-4034 MHVSR

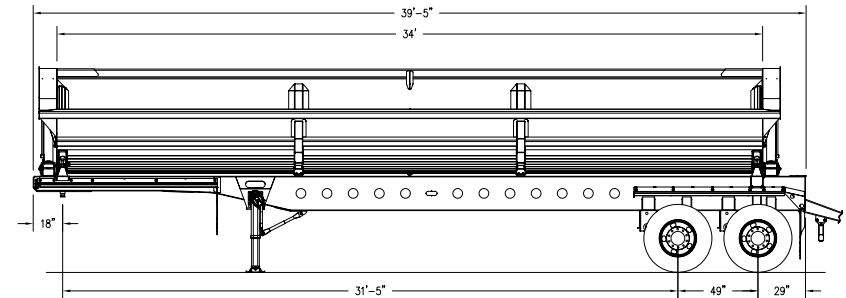

Model S3-4436 MHVSR

